


# MINIMESH

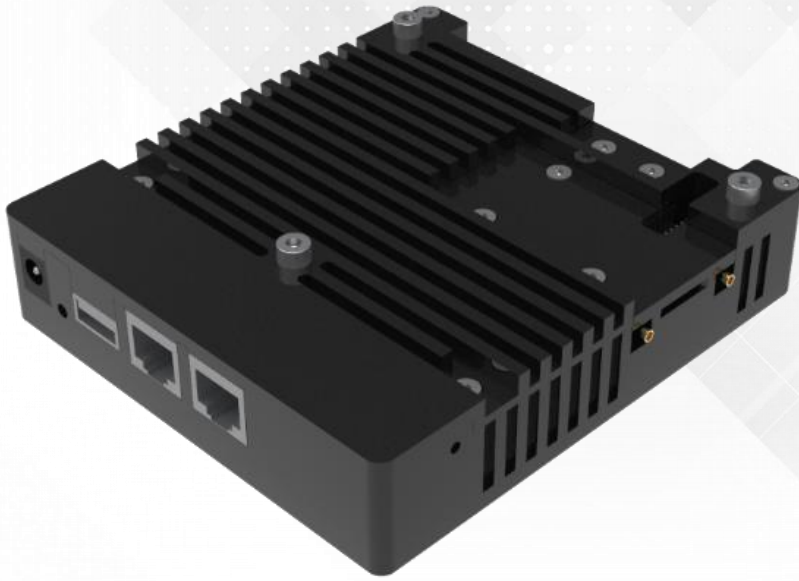

MiniMesh comes in lightweight, miniature and portable package that makes it especially suitable (but not limited to) for robots, vehicles, drones and tactical vests.

Infused with our LuceorOS operating system, it can relay data through the best available path for the ultimate combination of end-to-end performance, resilience, security, mobility, rapid deployment and minimal operating cost.

MiniMesh is equipped with dual radios , Ethernet interfaces, USB interface and GPIOs to provide flexibility and versatility.

**2 x WIMESH**

**COMPACT**

**ROUTER**

## KEY FEATURES

1 x 2x2 MIMO 5GHz 802.11a/b/g/n/ac radio transceivers

1x 2x2 MIMO 2.4GHz 802.11n transceiver


Wide range of external 2x2 MIMO antennas

LuceorOS manages network traffic by dynamically and intelligently selecting the best connection

MeshTool Suite software and web interface operate in tandem to configure, troubleshoot, and monitor the network architecture

Plug-and-Play installation

## SYSTEM ELEMENTS

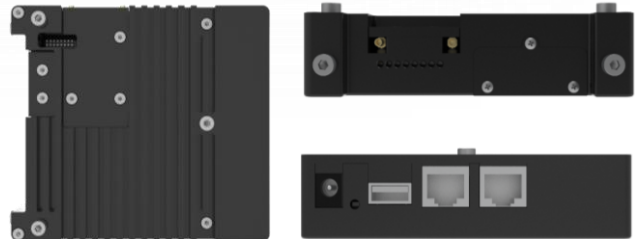

## HARDWARE SPECIFICATIONS

<b>CPU</b>	Quad-core CPU ARM Cortex A7 up to 717MHz, 128 MB Nand Flash, 32MB Nor Flash and DDR3L 256 MB		
<b>WLAN</b>	<b>Interface</b>	802.11a/b/g/n 2x2 MIMO 2.4GHz	802.11a/b/g/n/ac 2x2 MIMO 5GHz
	<b>Frequency<sup>1</sup></b>	2412 - 2482 MHz	5180 - 5825 MHz
	<b>Modulation</b>	DSSS, CCK, OFDM	OFDM (256-QAM, 64-QAM, 16-QAM, QPSK, BPSK)
	<b>Max. Physical Layer Data Rate</b>	300 Mbps	867 Mbps
	<b>Max. RF TX Power<sup>2,3</sup></b>	29 dBm	28 dBm
	<b>RX Sensitivity<sup>4</sup></b>	-96 dBm (@ 6 Mbps) to -70 dBm (@ MCS7, MCS15, HT40)	-96 dBm (@ 6 Mbps) to -62dBm (@ MCS9, MCS19, MCS29, HT80)

<b>Antennas</b>	4 x MMCX for WLAN
<b>External Ports</b>	2 x RJ-45, 10/100/1000 Mbps Ethernet, auto MDI/MDIX, support passive POE 1 x DC Jack 1 x USB3.0 1 x SD Card Slot 2 x 8 GPIOs header
<b>LED Indicators</b>	1 x Power indicator 2 x Status indicator
<b>Button</b>	1 x reboot or restore button
<b>Power Supply</b>	48 VDC Passive POE
<b>Power Consumption<sup>6</sup></b>	Max. 9W
<b>Dimensions</b>	126 x 113 x 28 mm 4.96 x 4.45 x 1.10 in.
<b>Weight</b>	0.2 Kg 0.44 lb.
<b>Temperature</b>	-40°C to 80°C -40°F to 176° F
<b>IP code</b>	IP30
<b>Materials</b>	Aluminum

<sup>1</sup>Channel, Frequency Channel, frequency and bandwidth options will vary based upon regional and local regulations

<sup>2</sup>TX power is governed by local regulations and varies by frequency

<sup>3</sup>TX power Tolerance is  $\pm 2$  dB

<sup>4</sup>RX sensitivity Tolerance is  $\pm 2$  dB

<sup>5</sup>Cellular RX sensitivity depends on the LTE bands

<sup>6</sup>Power consumption depends on transceiver configuration

## SOFTWARE SPECIFICATIONS

<b>Networking</b>	Compliance with 802.11s Mesh networking
	Compliance with IEEE 802.1q
	Proactive link-state routing protocol for Mesh networking
	SSID-based VLAN assignment
	Service set identifier (SSID) hiding
	Automatic and manual rate adjustment
	Automatic channel scanning and interference avoidance
	Frame aggregation, including A-MPDU (Tx/Rx) and A-MSDU (Tx/Rx)
	Tunnel data forwarding and direct data forwarding
	STA isolation in the same VLAN
	Access control lists (ACLs)
	Link Layer Discovery Protocol (LLDP)
	Network Address Translation (NAT)
	Virtual Router Redundancy Protocol (VRRP)
	Supports IPv6/ IPv4, UDP, TCP, ICMP, Telnet, SNMP, HTTP and FTP protocols
Static IP, dynamic IP or zero-configuration deployment	

<b>Management</b>	Web local management through HTTP or HTTPS
	Real-time configuration monitoring and fast fault location using the NMS
	SNMPv2c and v3
	System status alarm
	Network Time Protocol (NTP)
	Control and Provisioning of Wireless devices
	Remote software update
<b>Security</b>	Open system authentication
	WPA/WPA2/WPA-WPA2-PSK/WPA3 authentication and encryption
	Wireless intrusion detection system (WIDS) and wireless intrusion prevention system (WIPS)
	WPA/WPA2/WPA-WPA2-802.1x authentication and encryption
	IP Source Guard
	VPN with public key security (SSL/TLS mode) using client & server certificates.
	WPA, WPA2, and WPA-WPA2 support TKIP and CCMP encryption algorithms, where CCMP uses 256-bit advanced encryption standard (AES) encryption algorithm and has high security
<b>QoS Features</b>	Priority mapping and packet scheduling based on a Wi-Fi Multimedia (WMM) profile to implement priority-based data processing and forwarding
	WMM parameter management for each radio
	WMM power saving
	Priority mapping for upstream packets and flow-based mapping for downstream packets
	Queue mapping and scheduling
	User-based bandwidth limiting
Adaptive bandwidth management (automatic bandwidth adjustment based on the user quantity and radio environment)	

## STANDARDS AND CERTIFICATIONS

### FCC/CE

**Environmental**
**IP30**

## ORDERING INFORMATION

**IWR-2000ACN-D**

MINIMESH with one 5GHz, 2x2 MIMO, 802.11ac and one 2.4GHz, 2x2 MIMO transceivers