

# StartMesh Sector D120



StartMesh Sector D120 is a high-performance outdoor industrial WiMesh router designed for point-to-point and point-to-multipoint applications. It delivers long-distance transmission and high throughput of up to 500 Mbps to enable data, voice, and video applications. The router comes with an integrated sectorial antenna featuring a gain of 17dBi and a horizontal beamwidth of 120°, which improves its performance and expands its coverage area.

StartMesh Sector D120 is a cost-effective solution for CCTV applications. It is equipped with input and output PoE interfaces, allowing it to power other StarMesh Sector D120 routers. This feature enables you to place three routers to create a full 360° coverage area while only requiring the power supply for one router.

**WIMESH****BUILT-IN ANTENNA****OUTDOOR RATED**

## KEY FEATURES

2x2 MIMO 5GHz 802.11a/b/g/n/ac radio transceiver

Built-in 17dBi, 120°, 2x2 dual-slant polarization directional antenna

Useful Throughput up to 500Mbps

2 x RJ45, IN/OUT, 10/100/1000Mbps Ethernet (Passive POE)

MeshTool Suite software and web interface operate in tandem to configure, troubleshoot, and monitor the network architecture

Plug-and-Play installation

Outdoor rated: IP67, -40°C to +70°C temperature range

## 3D VIEWS



## HARDWARE SPECIFICATIONS

<b>CPU</b>	Quad-core CPU ARM Cortex A7 up to 717MHz, 128 MB Nand Flash, 32MB Nor Flash and DDR3L 256 MB		
<b>WLAN</b>	<b>Physical Layer</b>	Complies with IEEE 802.11a/b/g/n/ac, supports 2x2 MIMO and provides a maximum rate of 866Mbps	
	<b>Frequency<sup>1</sup></b>	U-NII-1: 5180 – 5250 MHz U-NII-2A: 5250 – 5330 MHz U-NII-2C: 5470 – 5725 MHz U-NII-3: 5725 – 5825 MHz	
	<b>Modulation</b>	OFDM : BPSK, QPSK, DBPSK, DQPSK, CCK, 16-QAM, 64-QAM, 256-QAM	
	<b>Max. EIRP<sup>2,3</sup></b>	51 dBm	
	<b>RX Sensitivity<sup>4</sup></b>	HT20	-96 dBm @ 6 Mb/s
	HT20	-93 dBm @ MCS8	-76 dBm @ MCS15

		HT40	-90 dBm @ MCS8	-73 dBm @ MCS15
		VHT20	-93 dBm @ MCS0	-71 dBm @ MCS8
		VHT40	-90 dBm @ MCS0	-68 dBm @ MCS9
		VHT80	-88 dBm @ MCS0	-61 dBm @ MCS9
<b>Integrated Antenna</b>	Gain	17 dBi		
	Polarization	Slant X		
	Beamwidth	9°/120°		
	VSWR	<2.00		
	Front to back	>24 dB		
<b>Ethernet Interfaces</b>	1x RJ45 output port ,10/100/1000BaseT, full duplex, IEEE 802.3, auto MDI/MDIX, passive POE 1x RJ45 input port , 10/100/1000BaseT, full duplex, IEEE 802.3, auto MDI/MDIX, passive POE			
<b>LED Indicators</b>	1 x RGB LED for RSSI and Alarm status			
<b>Button</b>	1x push button to restore factory settings and restart the device			
<b>Power Supply</b>	24 VDC Passive POE			
<b>Power Consumption<sup>5</sup></b>	Max. 9 W			
<b>Temperature</b>	Operating temperature: -40°C to 70°C   -40°F to 176° F Storage temperature: -45°C to 105°C   -49°F to 221° F			
<b>Humidity</b>	Operating Humidity : 5 to +95% (non-condensing) Storage Humidity : 0 to +90% (non-condensing)			
<b>Wind Resistance</b>	250Km/h			
<b>Dimensions</b>	486 x 290 x 105.6 mm 19.13 x 11.42 x 4.16 in.			
<b>Weight</b>	2.0 Kg 4.40 lb.			
<b>IP code</b>	IP67			
<b>Materials</b>	ABS, PTFE			

<sup>1</sup>Channel, Frequency Channel, frequency and bandwidth options will vary based upon regional and local regulations

<sup>2</sup>Transmission power is governed by local regulations and varies by frequency

<sup>3</sup>EIRP power Tolerance is ±2 dB

<sup>4</sup>RX sensitivity Tolerance is ±2 dB

<sup>5</sup>Power consumption depends on transceiver configuration

## SOFTWARE SPECIFICATIONS

<b>Networking</b>	Compliance with 802.11s Mesh networking
	Compliance with IEEE 802.1q
	Proactive link-state routing protocol for Mesh networking
	SSID-based VLAN assignment
	Service set identifier (SSID) hiding
	Automatic and manual rate adjustment
	Automatic channel scanning and interference avoidance


	Frame aggregation, including A-MPDU (Tx/Rx) and A-MSDU (Tx/Rx)
	Tunnel data forwarding and direct data forwarding
	STA isolation in the same VLAN
	Access control lists (ACLs)
	Link Layer Discovery Protocol (LLDP)
	Network Address Translation (NAT)
	Virtual Router Redundancy Protocol (VRRP)
	Supports IPv6/ IPv4, UDP, TCP, ICMP, Telnet, SNMP, HTTP and FTP protocols
	Static IP, dynamic IP or zero-configuration deployment
<b>Management</b>	Web local management through HTTP or HTTPS
	Real-time configuration monitoring and fast fault location using the NMS
	SNMPv2c and v3
	System status alarm
	Network Time Protocol (NTP)
	Control and Provisioning of Wireless devices
	Remote software update
<b>Security</b>	Open system authentication
	WPA/WPA2/WPA-WPA2-PSK/WPA3 authentication and encryption
	Wireless intrusion detection system (WIDS) and wireless intrusion prevention system (WIPS)
	WPA/WPA2/WPA-WPA2-802.1x authentication and encryption
	IP Source Guard
	VPN with public key security (SSL/TLS mode) using client & server certificates.
	WPA, WPA2, and WPA-WPA2 support TKIP and CCMP encryption algorithms, where CCMP uses 256-bit advanced encryption standard (AES) encryption algorithm and has high security
<b>QoS Features</b>	Priority mapping and packet scheduling based on a Wi-Fi Multimedia (WMM) profile to implement priority-based data processing and forwarding
	WMM parameter management for each radio
	WMM power saving
	Priority mapping for upstream packets and flow-based mapping for downstream packets

QoS Features	Queue mapping and scheduling
	User-based bandwidth limiting
	Adaptive bandwidth management (automatic bandwidth adjustment based on the user quantity and radio environment)

## STANDARDS AND CERTIFICATIONS

FCC	Part 15.C Part 15.E Part 15.247 Part 15.407 Part 1.1310 & 2.1091 Part 15.203 Part15.207 Part 15.205 Part 15.209
Environmental	IEC 60529 (IP67) RoHs compliance



## ANTENNA BEAMWIDTH

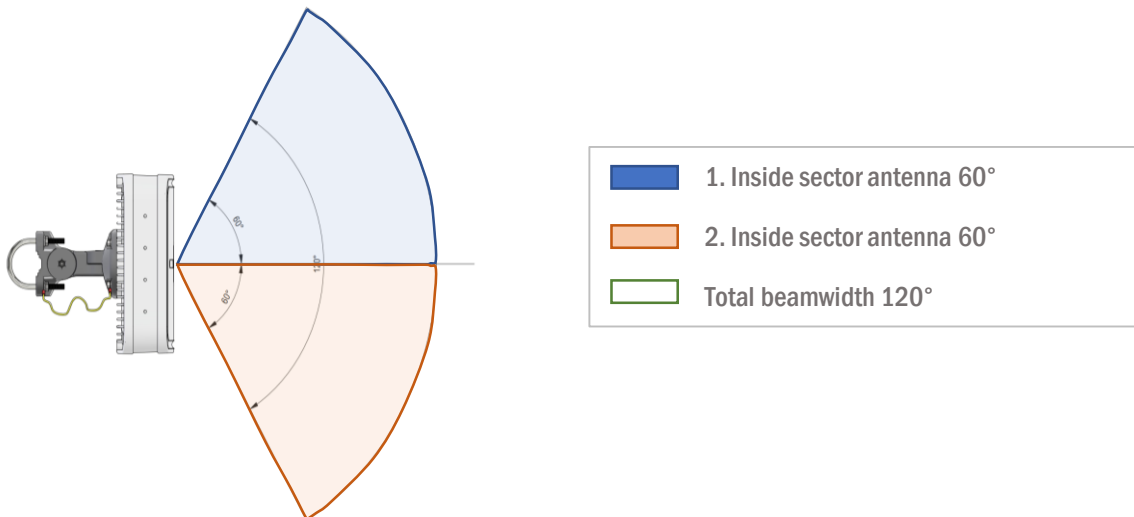

## ANTENNA PATTERNS



Port 1 Elevation

Port 1 Azimuth

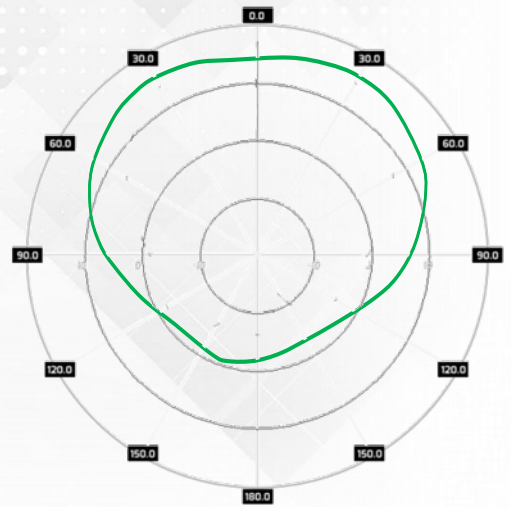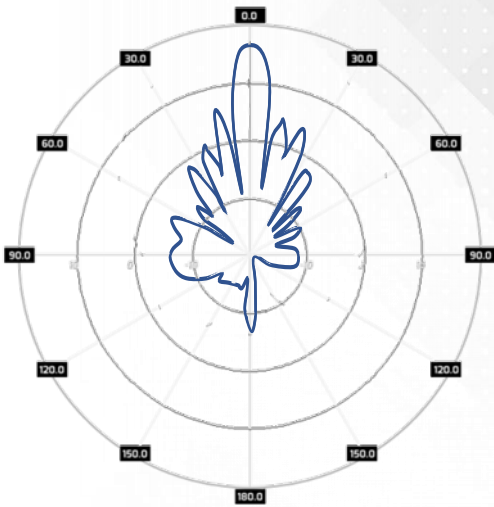


Port 2 Elevation

Port 2 Azimuth

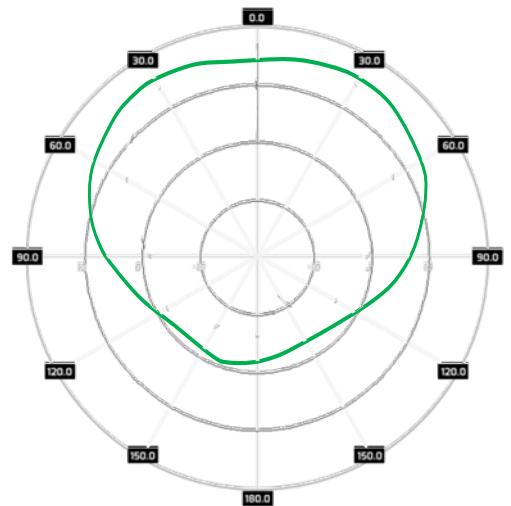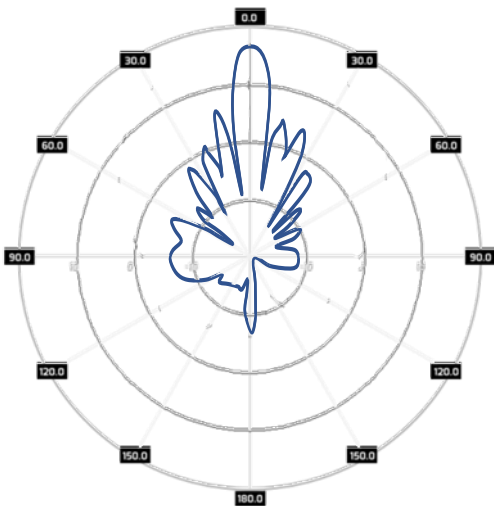

## DIMENSIONS

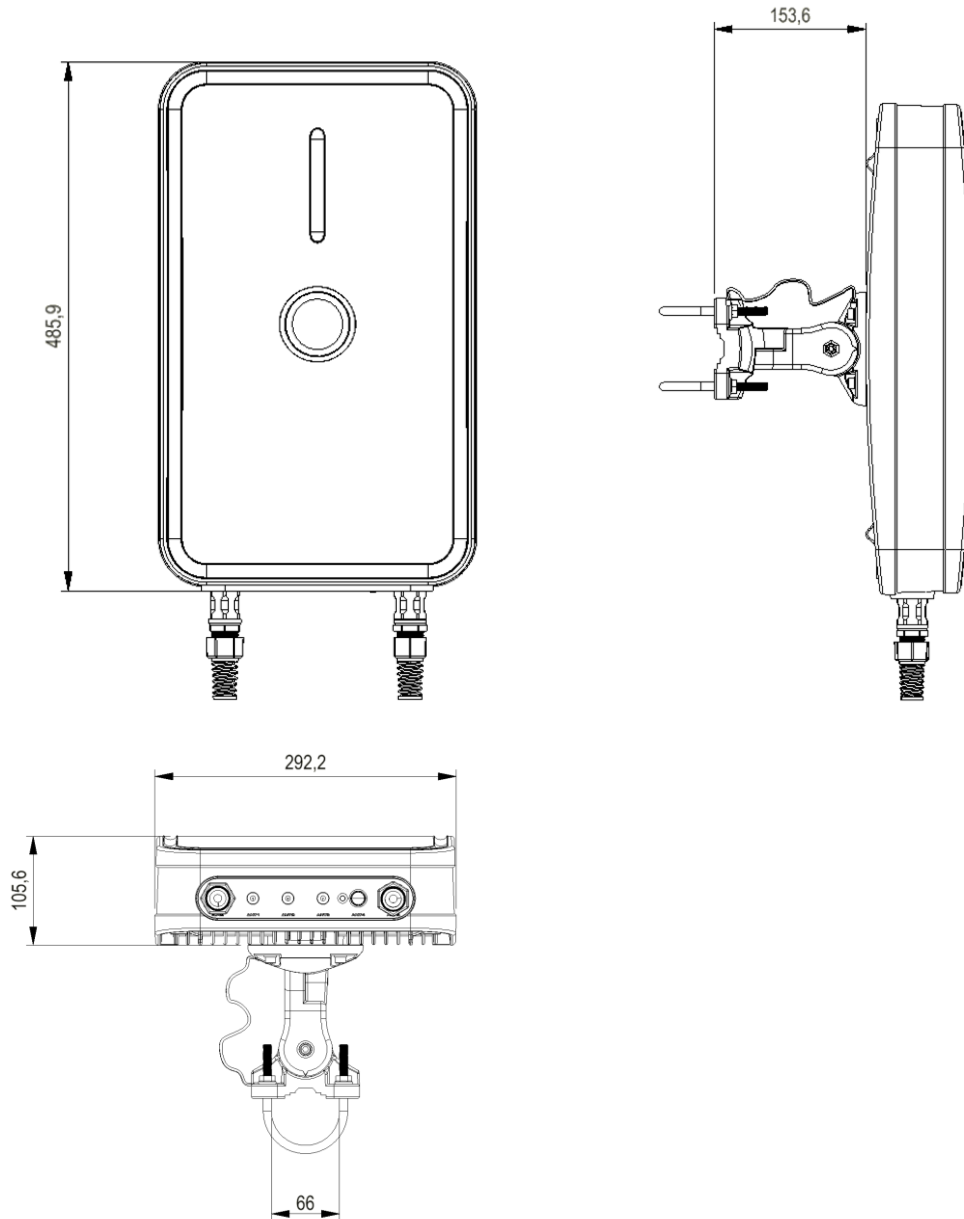

## ORDERING INFORMATION

**OWR-1000AC-C-SM120**

StartMesh Sector D120 with one radio transceiver 802.11a/b/g/n/ac, 2x2 MIMO, 5GHz, and one integrated antenna 120°, 17dBi.

AL-0010: 100-240VAC/24V DC 1A passive PoE power supply