

StartMesh Plus



StartMesh Plus is a powerful outdoor industrial WiMesh router for professional CCTV applications. It delivers long distance transmission and high-performance communication with up to 500 Mbps throughput to enable data, voice and video applications. Equipped with four Ethernet ports, three of which support IEEE 802.3af/at, StartMesh Plus provides the possibility to connect directly three CCTV cameras. StartMesh Plus can be rapidly deployed thanks to its high-gain integrated antenna and pointing LEDs.

WIMESH

BUILT-IN ANTENNA

OUTDOOR RATED

KEY FEATURES

- 2x2 MIMO 5GHz 802.11a/b/g/n/ac radio transceiver
- Built-in 20dBi 2x2 dual-slant polarization directional antenna
- Useful Throughput up to 500Mbps
- 4 x 10/100 Mbps Ethernet, three of which support IEEE 802.3af/at
- MeshTool Suite software and web interface operate in tandem to configure, troubleshoot, and monitor the network architecture
- Plug-and-Play installation
- Outdoor rated: IP67, -40°C to +70°C temperature range

3D VIEWS



HARDWARE SPECIFICATIONS

CPU	Quad-core CPU ARM Cortex A7 up to 717MHz, 128 MB Nand Flash, 32MB Nor Flash and DDR3L 256 MB			
WLAN	Physical Layer	Complies with IEEE 802.11a/b/g/n/ac, supports 2x2 MIMO and provides a maximum rate of 866Mbps		
	Frequency ¹	U-NII-1: 5180 – 5250 MHz U-NII-2A: 5250 – 5330 MHz U-NII-2C: 5470 – 5725 MHz U-NII-3: 5725 – 5825 MHz		
	Modulation	OFDM : BPSK, QPSK, DBPSK, DQPSK, CCK, 16-QAM, 64-QAM, 256-QAM		
	Max. EIRP ^{2,3}	47 dBm		
	RX Sensitivity ⁴	nHT20	-96 dBm @ 6 Mb/s	-80 dBm @ 54 Mb/s
		HT20	-93 dBm @ MCS8	-76 dBm @ MCS15

			HT40	-90 dBm @ MCS8	-73 dBm @ MCS15
			VHT20	-93 dBm @ MCS0	-71 dBm @ MCS8
			VHT40	-90 dBm @ MCS0	-68 dBm @ MCS9
			VHT80	-88 dBm @ MCS0	-61 dBm @ MCS9
Integrated Antenna		Gain	20 dBi		
		Polarization	Slant X		
		Beamwidth	16°/16°		
Ethernet Interfaces		3x RJ45 output ports,10/100 Mbps Ethernet, auto MDI/MDIX, active POE 802.3af/at 1x RJ45 input port ,10/100 Mbps Ethernet, auto MDI/MDIX, passive POE			
LED Indicators		1 x RGB LED for RSSI and Alarm status			
Button		1x push button to restore factory settings and restart the device			
Power Supply		44~60 VDC Passive POE			
Power Consumption ⁵		Max. 9 W			
Temperature		Operating temperature: -40°C to 70°C -40°F to 176° F Storage temperature: -45°C to 105°C -49°F to 221° F			
Humidity		Operating Humidity : 5 to +95% (non-condensing) Storage Humidity : 0 to +90% (non-condensing)			
Wind Resistance		250Km/h			
Dimensions		269.8 x 269.8 x 76.9 mm 10.62 x 10.62 x 3.03 in.			
Weight		1.8 Kg 3.97 lb.			
IP code		IP67			
Materials		ABS, PTFE			

¹Channel, Frequency Channel, frequency and bandwidth options will vary based upon regional and local regulations

²Transmission power is governed by local regulations and varies by frequency

³EIRP Tolerance is ±2 dB

⁴RX sensitivity Tolerance is ±2 dB

⁵Power consumption depends on transceiver configuration

SOFTWARE SPECIFICATIONS

Networking

- Compliance with 802.11s Mesh networking
- Compliance with IEEE 802.1q
- Proactive link-state routing protocol for Mesh networking
- SSID-based VLAN assignment
- Service set identifier (SSID) hiding
- Automatic and manual rate adjustment
- Automatic channel scanning and interference avoidance
- Frame aggregation, including A-MPDU (Tx/Rx) and A-MSDU (Tx/Rx)

	Tunnel data forwarding and direct data forwarding
	STA isolation in the same VLAN
	Access control lists (ACLs)
	Link Layer Discovery Protocol (LLDP)
	Network Address Translation (NAT)
	Virtual Router Redundancy Protocol (VRRP)
	Supports IPv6/ IPv4, UDP, TCP, ICMP, Telnet, SNMP, HTTP and FTP protocols
	Static IP, dynamic IP or zero-configuration deployment
Management	Web local management through HTTP or HTTPS
	Real-time configuration monitoring and fast fault location using the NMS
	SNMPv2c and v3
	System status alarm
	Network Time Protocol (NTP)
	Control and Provisioning of Wireless devices
	Remote software update
Security	Open system authentication
	WPA/WPA2/WPA-WPA2-PSK/WPA3 authentication and encryption
	Wireless intrusion detection system (WIDS) and wireless intrusion prevention system (WIPS)
	WPA/WPA2/WPA-WPA2-802.1x authentication and encryption
	IP Source Guard
	VPN with public key security (SSL/TLS mode) using client & server certificates.
	WPA, WPA2, and WPA-WPA2 support TKIP and CCMP encryption algorithms, where CCMP uses 256-bit advanced encryption standard (AES) encryption algorithm and has high security
QoS Features	Priority mapping and packet scheduling based on a Wi-Fi Multimedia (WMM) profile to implement priority-based data processing and forwarding
	WMM parameter management for each radio
	WMM power saving
	Priority mapping for upstream packets and flow-based mapping for downstream packets

	Queue mapping and scheduling
	User-based bandwidth limiting
	Adaptive bandwidth management (automatic bandwidth adjustment based on the user quantity and radio environment)


STANDARDS AND CERTIFICATIONS

FCC	Part 15.C Part 15.E Part 15.247 Part 15.407 Part 1.1310 & 2.1091 Part 15.203 Part15.207 Part 15.205 Part 15.209
Environmental	IEC 60529 (IP67) RoHs compliance

ANTENNA PATTERNS



Port 1 Elevation

Port 1 Azimuth

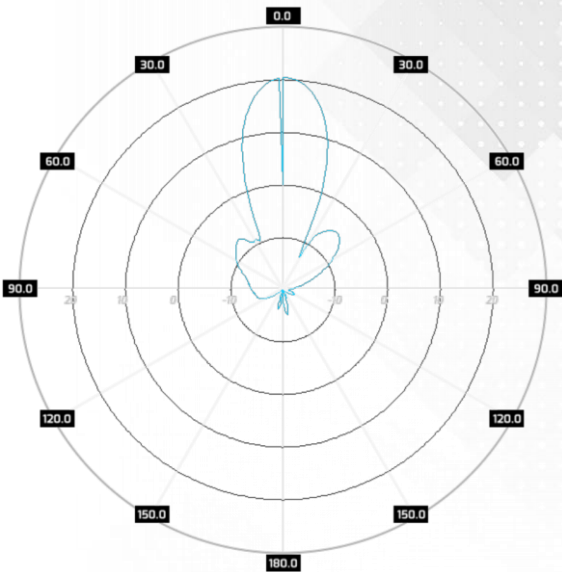


Port 2 Elevation

Port 2 Azimuth

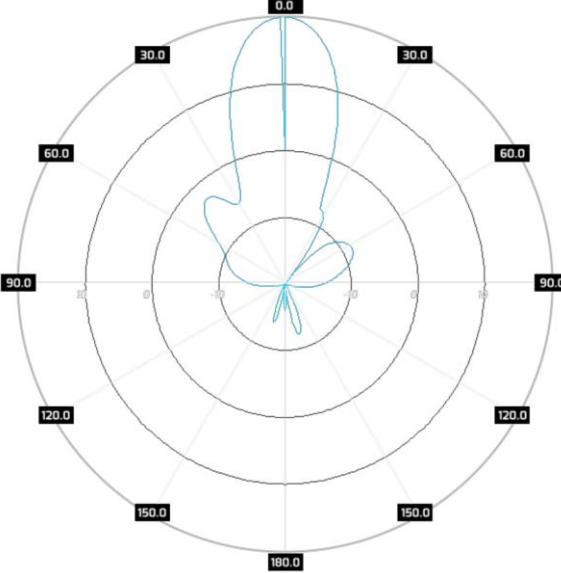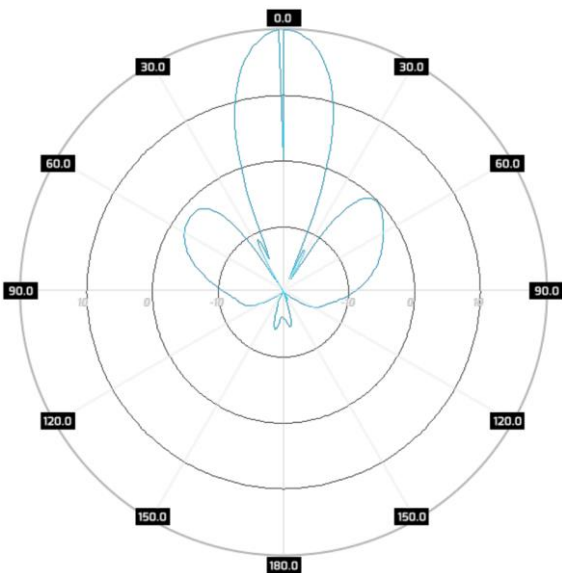

DIMENSIONS

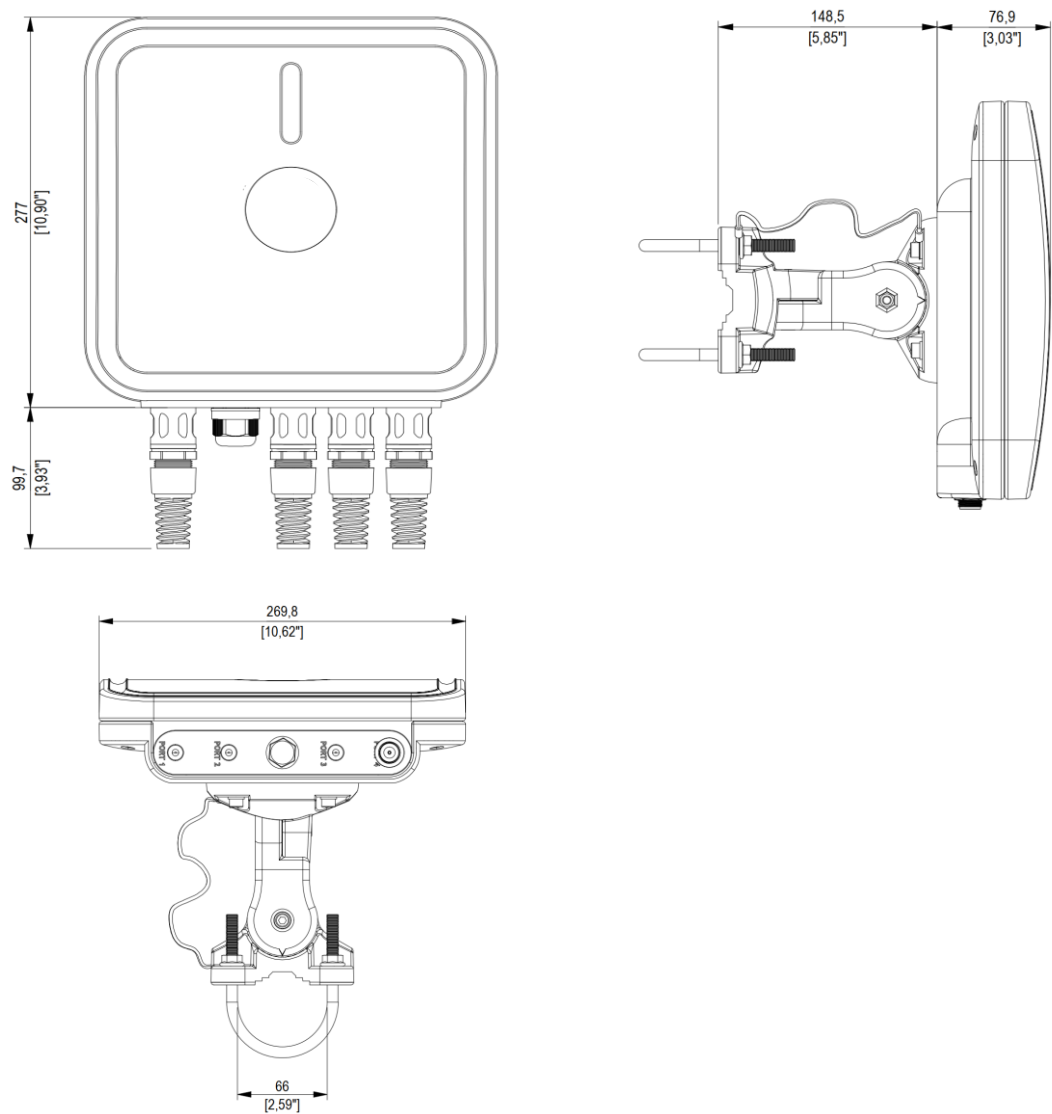

ORDERING INFORMATION

OWR-100AC-C-I20	StartMesh Plus with one radio transceiver 802.11a/b/g/n/ac, 2x2 MIMO, 5GHz, and one integrated antenna, 20dBi.
	AL-0011: 100-240VAC IN 0.8A Max 50/60HZ / 56V DC OUT 1A passive POE power supply